


Standard Basic Module -Open Type

- Highly efficient gas engine
- Highly reliable AC synchronous alternator
- Gas train
- Exhaust/water heat exchanger
- Water/water heat exchanger
- Heating circulation system
- Advanced engine control system, including: ignition system, detonation control system, speed control system, air/fuel ratio control system
- Industrial silencer
- Control cabinet and switch cabinet
- Multi-functional control system with simple operation
- Data communication interfaces integrated into control system
- Battery charger
- Automatic oil refilling system
- Island mode or connecting to the grid mode

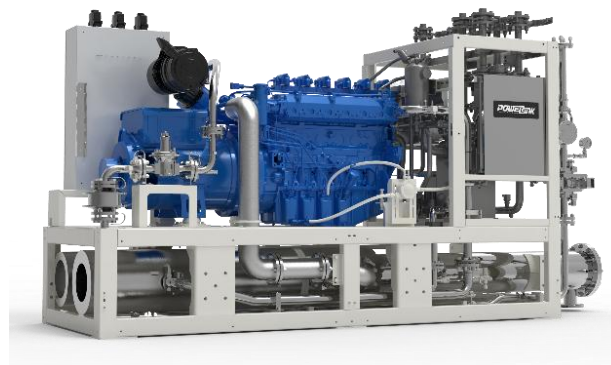

Structure and control cabinet

Structure type	Open type
Canopy painting	High-class powder coating
Electrical control cabinet	Integrated, IP54
Noise level@1m, dB(A)	91
@7m, dB(A)	87
@10m, dB(A)	84.7

Dimension and weight

Dimension (LxWxH) , mm	3700X1150X1750
Weight, kg	2200

Special statement :

- 1、The technical data are based on natural gas with a lower calorific value of 36MJ/Nm³. The technical data indicated is based on standard conditions according to ISO8528/1, ISO3046/1 and BS5514/1.
- 2、The technical data is measured in standard conditions:
Absolute atmospheric pressure: 100kPa
Ambient temperature : 25°C
Relative air humidity : 30%
- 3、Rating adaptation at ambient conditions acc to DIN ISO 3046/1.
The tolerance for the specific fuel consumption is + 5 % at rated output.
- 4、Technical data above are just for standard product ,and may be subject to change. As this document is used only for presale reference, take the specification supplied by PowerLink before ordering as final.

Power and efficiency @50Hz

Electric power -kW	100	Electric efficiency	38.0%
Heat power-kW	138	Heat efficiency	46.0%
Fuel input-kW	282	Total efficiency	84.0%

Fuel and emission

Fuel type	Natural gas
Methane number	MN > 80
Excess air factor (Lambda)	1.6
Fuel consumption @100% load, m ³ /h	28
Supply gas pressure range, kPa	10~20
Emission without catalytic converter	
NOx , mg/Nm ³	<500mg/Nm ³
CO , mg/Nm ³	<600mg/Nm ³
HCHO (formaldehyde) , mg/Nm ³	<60mg/Nm ³
NMHC , mg/Nm ³	<150mg/Nm ³
Emission with catalytic converter (optional)	
NOx , mg/Nm ³	≤ 250

CG100-NG

Natural Gas CHP Unit

POWERink
Power Systems
We Produce Green Energy...

Standard Basic Module + Acoustic Attenuated Canopy (Optional)



Dimension and Noise Level

Canopy Size	4000*1150*1750mm
Noise Level@ 1m , dB(A)	78.21
@ 7m , dB(A)	67.9
@ 10m , dB(A)	63.5

- ☐ Modular designed and manufactured for plug and play
- ☐ Environmental friendly low emission
- ☐ Small indoor space required for installation
- ☐ Low noise does not affect the surrounding environment



Standard Basic Module + Acoustic Attenuated Container (Optional)



Dimension and Noise Level

Optional container (mm) (customized container modeling serviceavailable)	☐ 7000*2300*2500
	☐ 6058*2438*2591
	☐ 12192*2438*2896
	☐ 12192*3000*2896
	☐ 13500*3000*2896
Noise Level@ 1m , dB(A)	76
	@ 7m , dB(A)
	@ 10m , dB(A)
61	

- ☐ Outdoor application enabled, weatherproof and dustproof, corrosion preventive
- ☐ Environmental friendly low emission
- ☐ Modular designed and manufactured for plug and play
- ☐ Low noise does not affect the surrounding environment



CHP Unit performance data and manufacturing technology

CHP unit model	CG100-NG	Power and efficiency			
Electric output power (kW)	100	Load	100%	75%	50%
Heat output power (kW)	138	Electric power (kW)	100	75	50
CHP unit electric efficiency	35.5%	Heat power (kW)	138	107	76
CHP unit heat efficiency	48.9%	Energy input (kW)	282	217	151
CHP unit total efficiency	84.4%	Electric efficiency	35.5%	34.6%	33.1%
Hot water production @inlet 70°C/outlet 90°C[t/h]	5.619	Heat efficiency	48.9%	49.3%	50.3%
Overload runtime at 1.1xSe(hour)	1	Total efficiency	84.4%	83.9%	83.4%
Steady-state voltage deviation	≤±1 %	Manufacturing technology - Special welded base frame, inner vibration isolators and design for whole lifting - With high-class paint, endurable brightness as well resistance against abrasion and defacing - Installation manual, operation and maintenance manual wiring program Standards and certificate - ISO3046 , ISO8528 , GB2820 - BS5000PT99 , AS1359 , IEC34 - ISO9001:2008 quality system certification			
Transient-state voltage deviation	-15%~20%				
Voltage recovery time(s)	≤4				
Voltage unbalance	1%				
Steady-state frequency regulation	±0.5%				
Transient -state frequency regulation	±5%				
Frequency recovery time(s)	≤3				
Steady-state frequency band	0.5%				
Recovery time response(s)	0.5				
Telephone interference factor(TIF)	≤50				
Telephone harmonious factor(THF)	≤2% , as per BS4999				

AC alternator performance data

Alternator brand	Leroy-Somer	Voltage	Power
Alternator model	LSA44.3L10	380V	120 kW
Rated output power (kW)	120	400V	120 kW
Power factor	0.8	415V	120 kW
Rated current @400V and 100% load (A)	217	440V	108 kW
Excitation system	Brushless		
THF (BS EN60034- 1)	<2%		
Bearing number	1		
Winding material	100% copper		
Wiring connection	Star		
Rotor insulation class	H		
Winding pitch	2/3		
A.V.R. model	R438		
Voltage fluctuation(no load to full load)	± 0.5%		
Housing protection	IP23		
TIF (NEMA MG 1-22)	<50		
Excitation method	AREP		
Rated ambient temperature(°C)	40		
Rated stator temperature rise(°C)	125		

Efficient gas engine

General data

NO. of cylinders		6
Engine type	4-stroke, turbo charged and air to water cooled, lean burn	
Cylinder arrangement		In line
Bore x stroke	mm	108×125
Displacement	L	6.87
Compression ratio		11 : 1
Rated speed	rpm	1500
Rated output power	kW	110
Excess air factor		1.6
Rotation direction	Anti-clockwise viewed on flywheel	
Ignition timing	°BTDC	17

Cooling system

Coolant refilling capacity	L	16
Max. jacket water operating pressure	kPa	300
Min. jacket water circulation flow	L/min	221
Min. jacket water temperature	°C	80
Max. jacket water temperature	°C	88
Max. jacket water difference(inlet-outlet)	K	6
Min. circulation flow LT	L/min	32
Min. circulation flow HT	L/min	39
Coolant type	Mixture of 40% antifreeze and 60% clean fresh water. Lower ambient temperature, higher content of antifreeze.	

Induction/exhaust system

Exhaust flow(wet)	kg/h	594
Combustion air flow	kg/h	573
Exhaust temperature	°C	450
Max. exhaust back pressure	mbar	40
Max. suction restriction	mbar	15

Fuel control system

Gas train, Including:	ball valves
	filters
	gas pressure gauge
	safety solenoid valves
	constant pressure regulator etc
	gas pressure relief valve

Lubrication system

Max. refilling capacity	L	34
Min. refilling capacity	L	24
Max. consumption	kg/h	0.125
Lubrication oil pump	Gear driven	

Energy balance and gas flow



Load	100%	75%	50%
Mechanical power, kW	110	83	55
Coolant heat, kW	82	71	58
Mixture heat HT, kW	6	4	0
Mixture heat LT, kW	5	3	1
Exhaust heat up to 120°C, kW	50	39	28
Max. radiation heat, kW	12	/	/
Energy input, kW	282	217	151
Combustion air flow, kg/h	573	404	244
Fuel consumption, m ³ /h	28	22	15
Exhaust gas flow, kg/h	594	420	255
Exhaust gas temperature, °C	505		

Ignition system

Ignition type	Electronic ignition system	
Polarity	Negative earth	
Spark plug	Separate for every cylinder	

PCC-300 control system

Programmable control system is adopted with touch screen display , and various functions, including: engine protection and control, CHP parallel and grid connection, and CHP control functions,as wellas communication functions, etc.

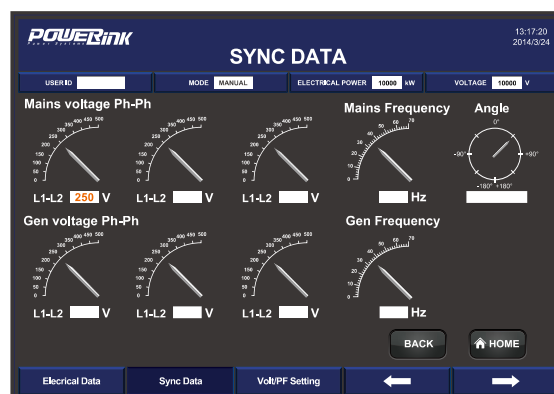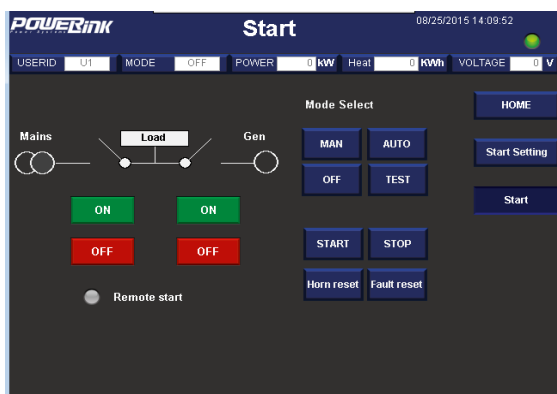

Main functions

- Engine monitor : coolant, lubrication, exhaust, battery
- Supply gas circuit monitor: pressure,temperature and CH4 content
- Auto paralleling and load share
- Voltage and PF control
- Alternator data : U, I, Hz, kW, kVA, kVAr, PF, kWh, kVAh
- Griddata: U, I, Hz, kW, kVAr, PF
- Modbus communicationprotocol based on RS232 and RS485 interfaces
- SMS message
- Internet connection and USB 2.0 interface
- 10-inch touch screen
- Internet monitor, auto orientation and cloud communication
- 1000 history events log

Advantages

- Accordant with consumer requirement
- Complete control solution
- Convenient remote monitor and service
- Simplified engine start/stop control
- Enhanced stability and safety

Standard protection functions	Standard control functions	
Alternator protection - 2xReverse power - 2xOverload - 4xOvercurrent - 1xOvervoltage - 1xUndervoltage - 1xOver/underfrequency 1xUnbalanced current	Powercontrol - RPM control(synchronization) - Power control(grid connection) - Load share(island)	Voltage control - Voltage tracking (synchronization) - Voltage control(island) - PF control(grid connection) - Reactive power share (island)
	Lubrication control - Auto refilling - Warning and monitoring	Pump control - Cooling system - Emergency radiator
Busbar/ Gridprotection - 1xOvervoltage - 1xUndervoltage - 1xOver/under frequency - 1xPhase sequence - 1xROCOF alarm	Fan control - Ventilation for engine room - Radiator fan - Emergency radiator fan	Valve control - Cooling system - Heating system - Emergency radiator
	Engine protection - Various routine and customized protection functions - Monitoring	

Standard configuration

Engine	Alternator	Canopy and base	Electrical cabinet
Gas engine Ignition system Lambda controller Speed control system Electrical start motor Battery system Detonation control system Lockable isolator switch Turbocharger & intercooler Jacket water heater	PMG AC alternator H class insulation IP23 protection AVR voltage regulator	Steel monocoque base frame Engine bracket Vibration isolators Alternator base	Air circuitbreaker PCC300 control system 10.4-inch touch screen Communication interfaces Breaker cabinet Mains floating charger Paralleling protection
Gas supply system	Lubrication system	Standard voltage	Intake/ exhaust system
Gas safety train Air/fuel mixer Throttle valve	Oil filter Daily auxiliary oil tank Auto refilling oil system New and waste oil tank (Only applicable to container)	380/220V 400/230V 415/240V 440/254V	Air filter Exhaust silencer Exhaust bellows Gas leakage protection(Only applicable to canopy and container)
Heat exchange system	Service and documents		
Exhaust/water heat exchanger Jacket water circulation pump Water/water heat exchanger Mixture circulation pump Expansion tank Heating circulation pump Three-way valves Intercoolerradiator	Tools package Installation and operation manual Maintenance manual Software manual Parts manual	Engine operation and maintenance manual Gas quality declaration Control system manual After service guide	

Optional configuration

Engine/Alternator	Electrical system	Gas supply system
Jacket water radiator Space heater Treatments against humidity and corrosion	RCD ATS control cabinet Thermal power gauge Electric power gauge	Gas flow gauge Emergency pressure relief torch Water separator Gas compressor Gas purification device
Voltage	Exhaust system	Exhaust gas using
220V 230V 240V	Three-way catalytic converter	Steam boiler LiBr refrigerator